



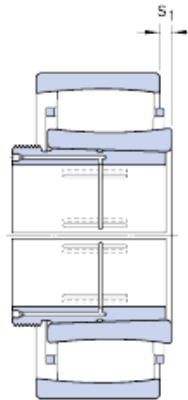

Jinan Shenglei Bearing Co., Ltd.

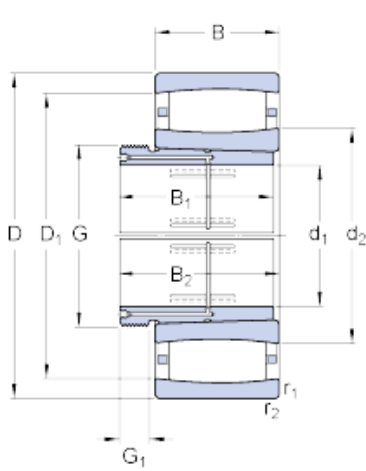

SKF C 3192 KM + AOHX 3192 G Cylindrical roller bearing

Bearing No. C 3192 KM + AOHX 3192 G

C 3192 KM + AOHX 3192 G Bearing 2D drawings and 3D CAD models

Size	760x440x285 mm
Bore Diameter	760 mm
Outer Diameter	440 mm
Width	285 mm
d_1	440 mm
D	760 mm
B_1	285 mm
d_2	559 mm
D_1	679 mm
B	240 mm
G	Tr 480x5
G_1	480 mm
s_1	51 mm
$r_{1,2}$ - min.	7.5 mm
d_a - min.	477 mm
d_a - max.	603 mm
D_a - min.	651 mm
D_a - max.	728 mm
C_a - min.	4.2 mm
r_a - max.	6 mm
Basic dynamic load rating - C	6800 kN
Basic static load rating - C_0	12000 kN
Fatigue load limit - P_u	815 kN



Jinan Shenglei Bearing Co., Ltd.

Reference speed	600 r/min
Limiting speed	800 r/min
Factor - k_1	0.108
Factor - k_2	0.105
d_1	440 mm
B_1	285 mm
d_2	559 mm
D_1	679 mm
B_2	296 mm
G_1	43 mm
s_1 max.	51 mm
$r_{1,2}$ min.	7.5 mm
d_a min.	477 mm
d_a max.	603 mm
D_a min.	651 mm
D_a max.	728 mm
C_a min.	4.2 mm
r_a max.	6 mm
Basic dynamic load rating C	6800 kN
Basic static load rating C_0	12000 kN
Fatigue load limit P_u	815 kN
Misalignment factor k_1	0.108
Operating clearance factor k_2	0.105
Mass bearing + sleeve	480 kg